


AT 20

B

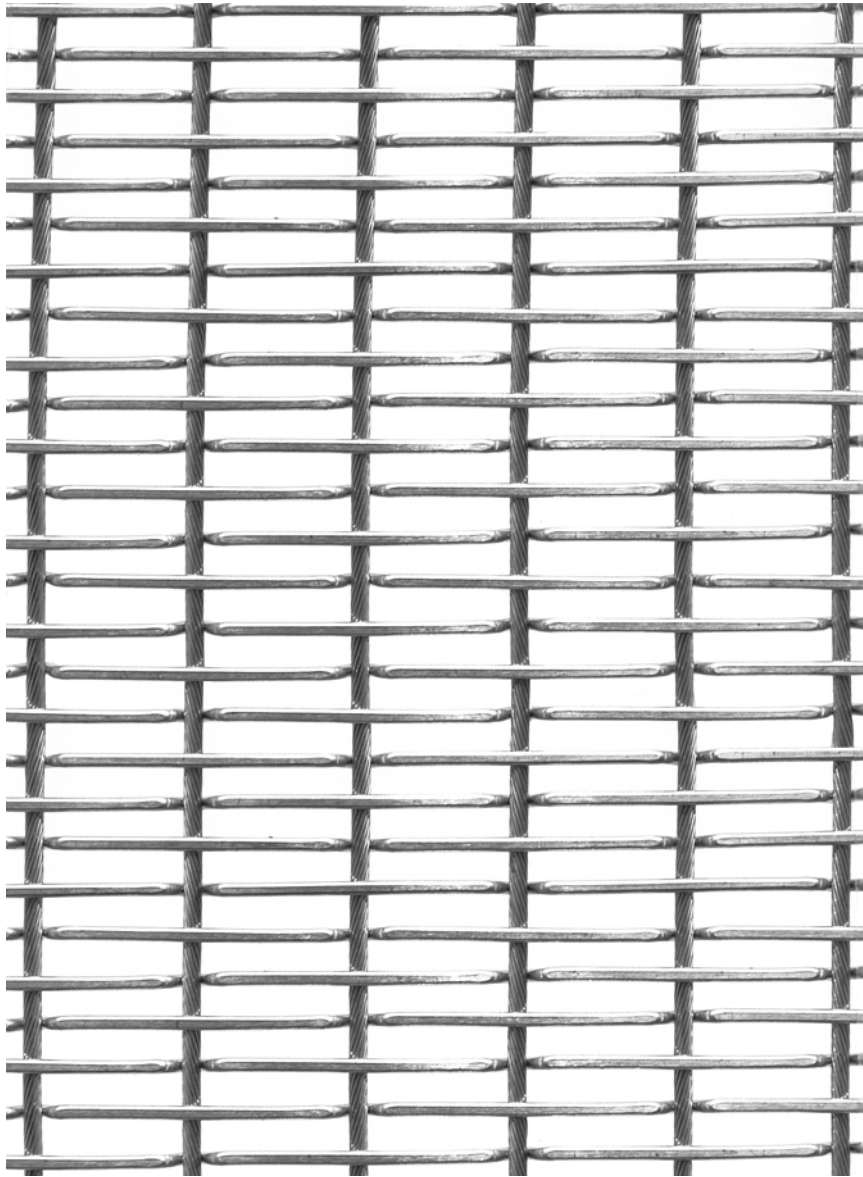

type of mesh	aperture (mm)	wire diameter (mm)	weight (kg/m ²)	open area (%)	width max. (m)
Cable-Flex	15 x 3.5	1.5 / 2	4.4	57	3.0
application			mounting		
<ul style="list-style-type: none"> • exterior + interior • claddings • partitions 			<ul style="list-style-type: none"> • slotted tube • framing 		