


**AT 70**

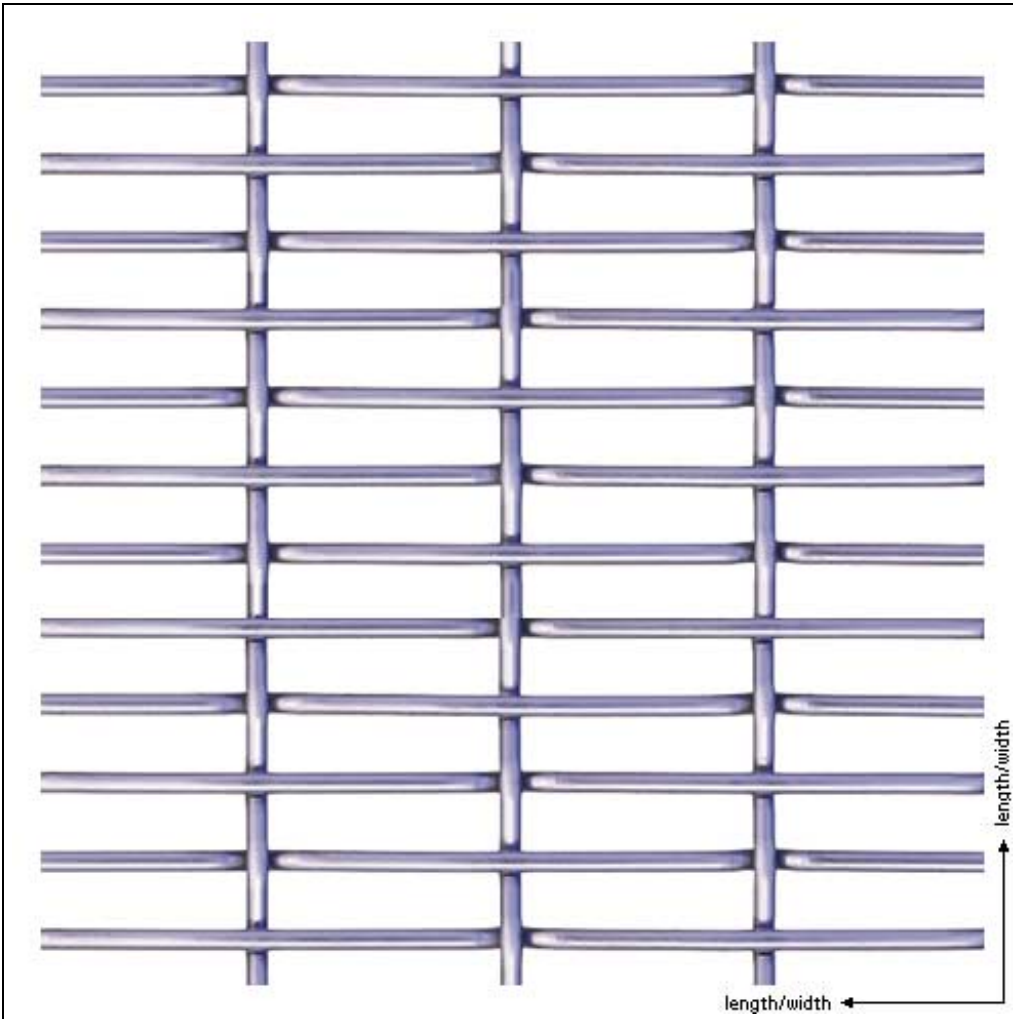

| type of mesh   | aperture (mm)  | wire diameter (mm) | weight (kg/m <sup>2</sup> )   | open area (%) | standard width (m) |
|--|----------------|--------------------|---|---------------|--------------------|
| <b>Egla-Mono</b>   | <b>10 x 40</b> | <b>4.0</b>         | <b>10.2</b>   | <b>65</b>     | <b>2.0</b>         |
| application  |                |                    | ways of mounting  |               |                    |
| <ul style="list-style-type: none"> <li>• for exterior applications mainly</li> <li>• cladding, balustrades</li> <li>• rails</li> </ul> |                |                    | <ul style="list-style-type: none"> <li>• slot or frame section</li> </ul> |               |                    |