


**AT 10**

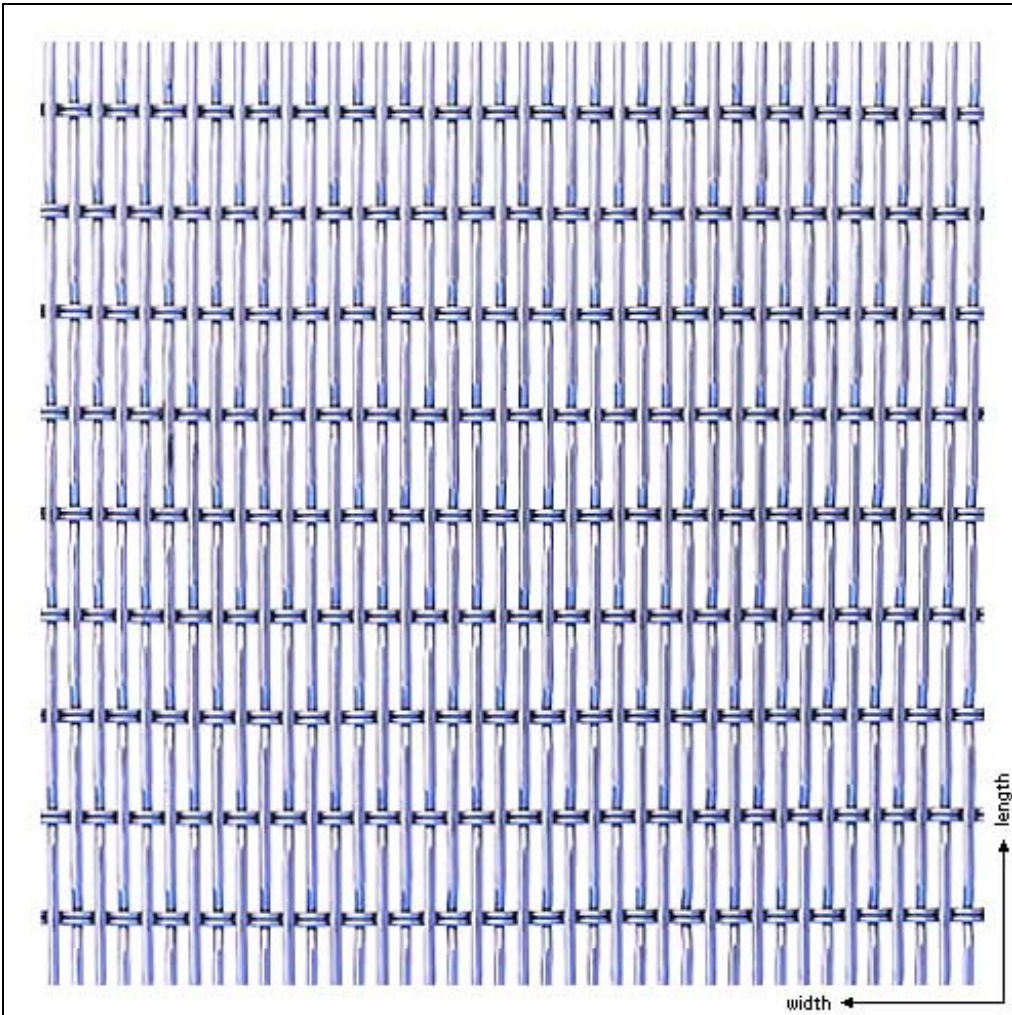

type of mesh	aperture (mm)	wire diameter (mm)	weight (kg/m <sup>2</sup> )	open area (%)	standard width (m)
<b>Egla-Twin</b>	<b>2 x 15</b>	<b>2.0 / 2 x 1.25</b>	<b>7.8</b>	<b>43</b>	<b>2.0</b>
application			ways of mounting		
<ul style="list-style-type: none"> <li>• exterior and interior wall cladding</li> <li>• lowering elements for ceiling partitions</li> <li>• trade fair</li> </ul>			<ul style="list-style-type: none"> <li>• tensioning selvedge</li> <li>• bolted tube</li> <li>• angled framing</li> </ul>		