


**AT 40**

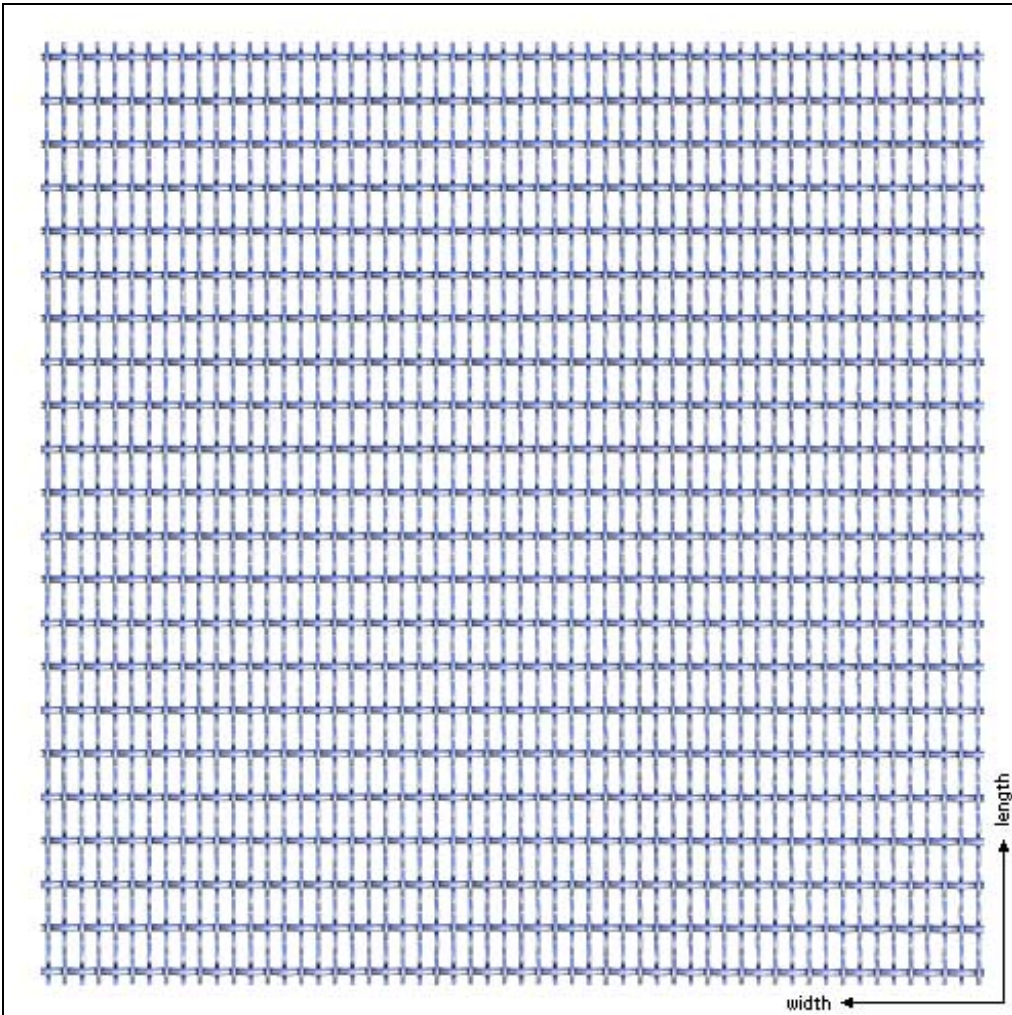

type of mesh	aperture (mm)	wire diameter (mm)	weight (kg/m <sup>2</sup> )	open area (%)	standard width (m)
<b>Dokawell-Mono</b>	<b>2 x 6</b>	<b>0.9 / 1.4</b>	<b>3.6</b>	<b>56</b>	<b>2.0</b>
application			ways of mounting		
<ul style="list-style-type: none"> <li>• ceilings, coffered ceilings</li> <li>• trade fair and exhibition</li> <li>• sun protection</li> </ul>			<ul style="list-style-type: none"> <li>• tensioning selvedge</li> <li>• bolted tube</li> <li>• angled framing</li> </ul>		