


AT 44

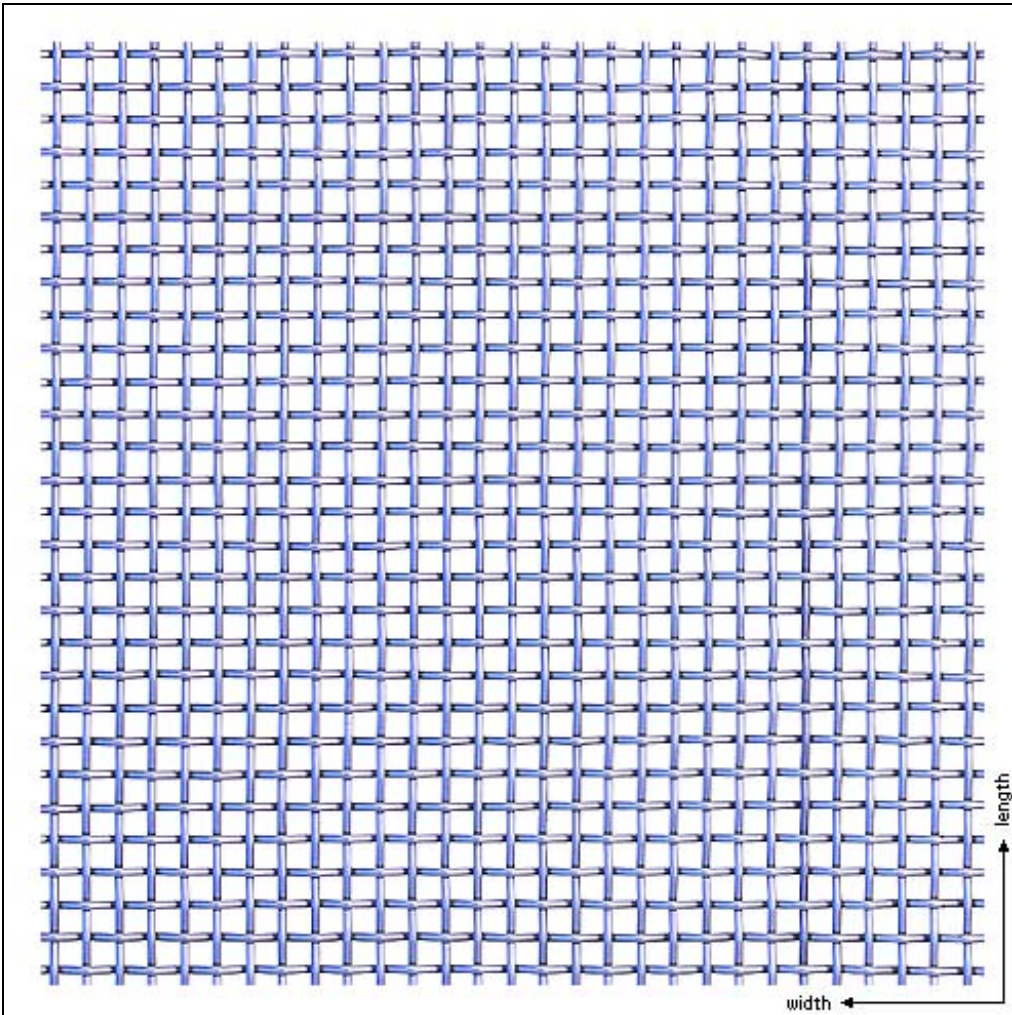

type of mesh	aperture (mm)	wire diameter (mm)	weight (kg/m ²)	open area (%)	standard width (m)
Doka-Mono	4 x 4	1.6	6.2	51	2.0
application			ways of mounting		
<ul style="list-style-type: none"> • lowering elements for ceiling, coffered ceiling • trade fair and exhibition applications • sun protection 			<ul style="list-style-type: none"> • slot or frame section • bolted tube • angled framing 		